


## SPECIFICATIONS

Engine type	H series BS-VI - 6 cylinder, CRS with iGen6 technology
Max power	200 HP @ 2400 rpm
Max torque	700 Nm @ 1200 - 2000 rpm
Clutch	380 mm dia - Single dry plate, ceramic clutch with air assisted hydraulic booster
Gear box type	6 speed synchromesh
Rear axle	Fully floating single speed rear axle, RAR: 5.83:1 Optional : Unitized wheel bearings
Front axle	Forged I section – Reverse Elliot type Optional : Unitized wheel bearings / Anti roll bar
Suspension	Front: Semi-elliptic multi leaf / Parabolic springs (optional) Rear: NRS suspension Slipper ended suspension (optional)
Chassis frame	Made of high strength steel (HSS) with new improved, bolted construction. Dimensions - 275x75x7 mm
Brakes	Full air dual line brakes with ABS and auto exhaust brake
Fuel tank	Rectangular cross linked polymer Capacity: 375 litres on LH side
AdBlue tank	48 Lts
Max speed	80 kmph
Electricals	24V/120 Ah – 150 AH only on AC models
Tyres	295/90R20 – 16 PR
Cabin	G – Economy Cowl, M -Economy cabin, U -Value cabin and N - Premium cabin ; AC option on U/N variants
Vehicle configuration options	Cowl & chassis / Cabin & chassis
Chassis weight (Laden) kgs	FAW-7000+7000 ; LAW-7000 ; RAW – 11500; GVW - 31000

## MAJOR DIMENSIONS

Load span (m)	7460	9710
Wheelbase (mm)	4930	5980
Overall length (mm)	9710	11060
Turning circle dia (m)	20.2	24
Overall width (mm)	2570	
Overall height (mm)	M cabin – 2987 / U cabin – 3247 / N (WIM) cabin - 3177	

## SCHEMATIC LAYOUT

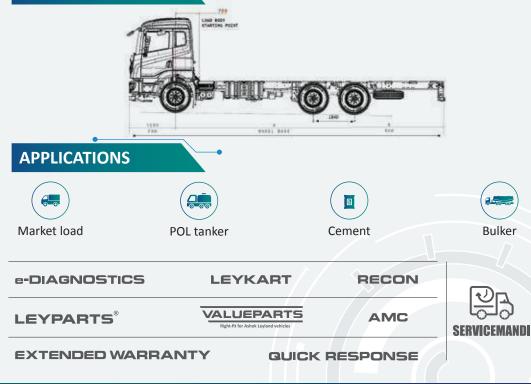

ASHOK LEYLAND Aapki Jeet. Hamari Jeet.

Registered Office - Ashok Leyland Limited, No. 1, Sardar Patel Road, Guindy, Chennai - 600032, Tel. - 91 44 2220 6000 E-mail - reachus@ashokleyland.com | Website - www.ashokleyland.com

HELPLINE 1800-266-3340

HINDUJA GROUP